

- ◆ **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- ◆ **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove old fixture, including the single bar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach the mounting screw part way into the side hole of the crook cross bar, then lock it securely with hex nut until suited. Attach the cross bar to the junction box using two box screws as shown. The side of the cross bar marked "GND" must face out. The junction box is not included.
4. Follow wiring instructions carefully (see fig.2).
5. Install the light bulb(Not included) in accordance with the fixture's specifications. **NOTE: DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
6. Raise the finial(K) to the top center pipe thread of the cover(A), by turn it until tight. Place the cover(A) onto the top of lamp body(C), lock it securely with the ball nuts(B). Raise the end of pipe thread(E) into the bottom coupling of the lamp body(C), by turning it until tight. Slide the cover(J), tapered tube(F), cover(G) and(H) to the other end of pipe thread(E), then lock it securely with the finial(I).
7. NOTE: maybe you cancel the tapered tube(F), then assemble cover(J) with a short pipe thread(E1).
8. Attach the back plate of the lamp body(C) onto the junction box, aligning screws on cross bar with mounting holes and lock it securely with the ball nuts(D).
9. **With silicone caulking compound, caulk completely around where back of cover meets with the wall surface to prevent water from seeping into junction box.**

CONNECTING THE WIRES (Fig.2)

1. Connect the electrical wires as follows. Connect the Black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your junction box has a ground wires (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the crossbar.
2. Tuck the wire connections neatly into the wall junction box.

Your installation is now complete. Return power to the junction

box and test the fixture.

FIG.1


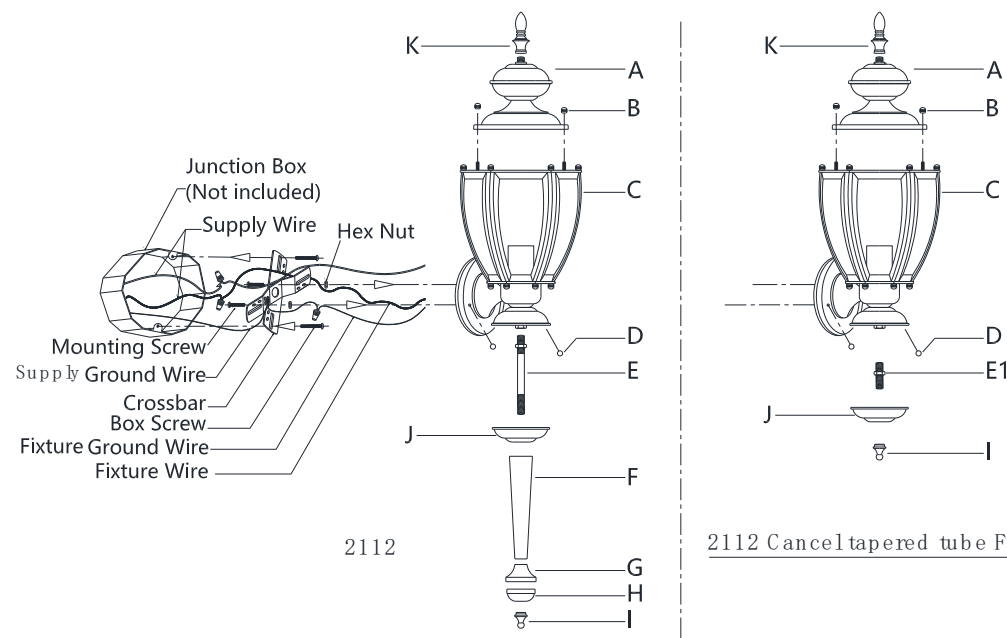


FIG.2

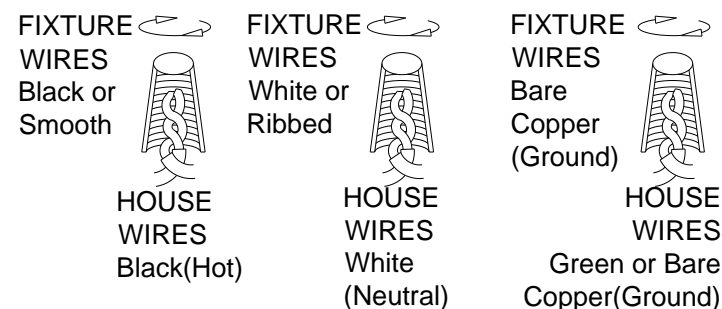

Thank you for purchasing a **LIVEX** product.
Need assistance with parts or assembly? Please call customer service at: **800-761-8056**
Or visit us on-line at: WWW.LIVEXLIGHTING.COM